




Stainless Steel Ball Valve

Model: QF-300

With Lock Type / Without Lock Type

Technical Features

- Size: DN15-DN50 / 1/2"-2"
- Working Pressure: 200PSI / 300PSI / PN10 / PN16
- Design Standard: API608
- Test Standard: API598
- Connection Standard: ASME B1.20.1 / BS EN 10226-1/GB/T 7307
- Working Temperature: -20 to 180°C
- FM/UL Approved

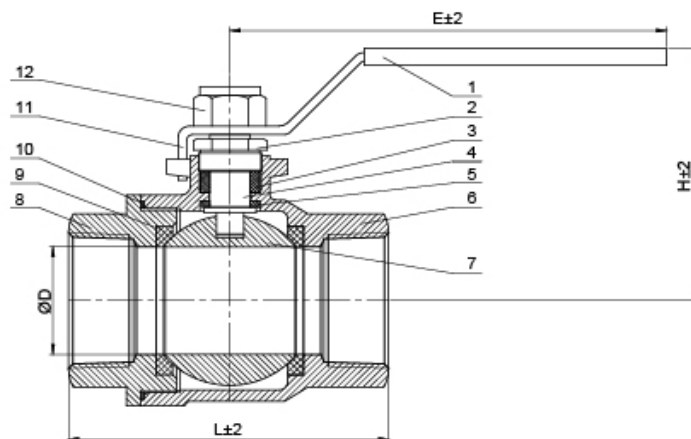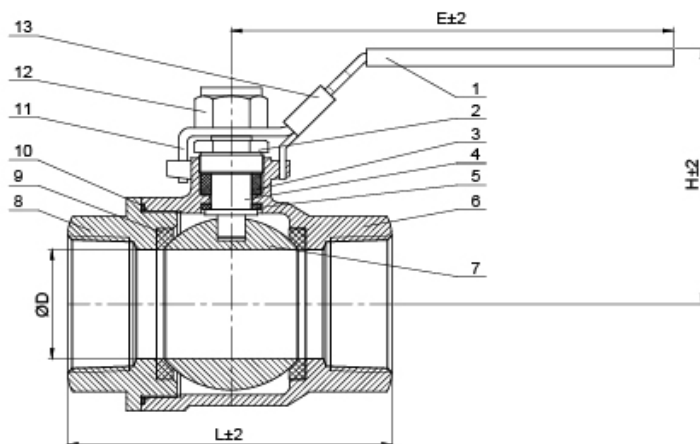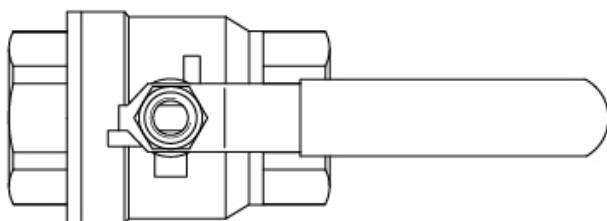

Valve Material List

NO.	Name	Qty	Material
1	Handle sleeve	1	PVC
2	Gland	1	S20100 / S30400 / S31600
3	Packing	1	PTFE
4	Stem	1	S20100 / S30400 / S31600
5	Thrust washer	1	PTFE
6	Body	1	CF8 / CF8M
7	Ball	1	CF8 / CF8M
8	End cap	1	CF8 / CF8M
9	Seat	2	PTFE
10	Gasket	1	PTFE
11	Handle(lock)	1	S20100 / S30400 / S31600 / Steel
12	Nut	1	S20100 / S30400 / S31600
13	Lock Block	1	S20100 / S30400 / S31600 / Steel

Dimensions

DN	INCH	D	L	E	H
15	0.5"	15	64.5	100	58
20	0.75"	20	77	100	62
25	1"	25	85	126	68
32	1.25"	32	100	126	75
40	1.5"	38	111	150	89
50	2"	50	124	150	97